

ER14335M Lithium Thionyl Chloride Battery

Brief Datasheet

1 Basic Specification


(Typical values relative to cells stored for one year or less at + 30 °C max.)

Nominal capacity (at 4mA +23°C, 2.0V cut off)	1200mAh
Nominal voltage	3.6V
Standard discharge current	4mA
Maximum continuous current	300mA
Maximum pulse current	500mA
Operating temperature range	-55 °C - +85 °C
Storage temperature (recommended)	+30 °C Max
Weight	13g




*High power type is spiral structure and best suit for high current discharge.

*Underwriters Laboratories (UL) Component Recognition (File Number MH 20555).

2 Dimension

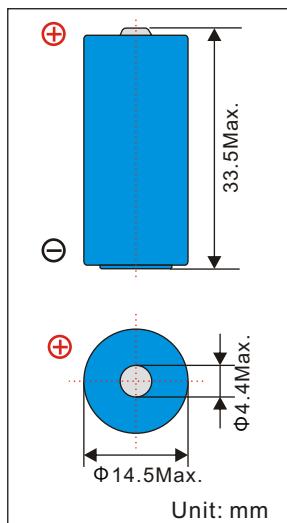

3 Electrical Characteristics

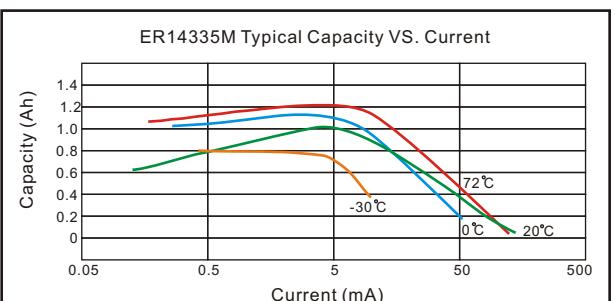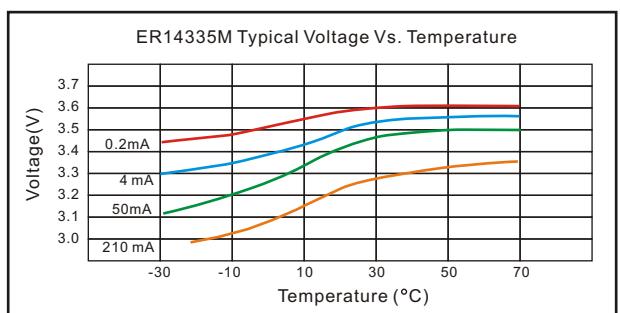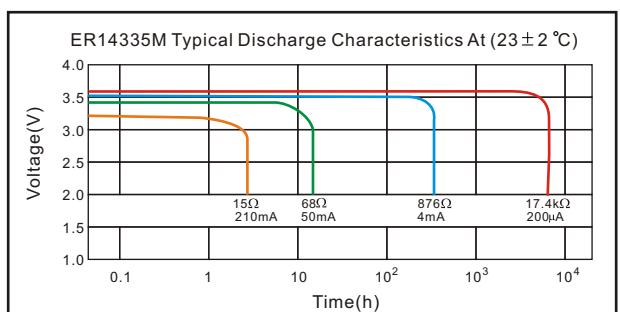

Hi-POWER TYPE

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.