


SPECIFICATIONS

(Typical values stored at 20°C for one year)

Nominal capacity (at 1mA/20°C/68°F/2.0V cut-off)	1.2Ah
Nominal voltage	3.6V
Max. recommended continuous current (Higher current can be available upon consulting)	30mA
Max. pulse current capability ★	100mA
Operating temperature range	-55 ~+85°C
Lithium metal content	approx. 0.3g
Weight	9g
Volume	4.3cm³
UL Approval	MH28122

Max Pulse Capability

Maximum Pulse capability reading over 3.0V at 100mA/0.1sec. every 2 min. at +20°C , 10µA / cm² base current with fresh batteries. The pulse capability can be different to the cell status, environment. For max. pulse coverage, capacitor support is recommended.

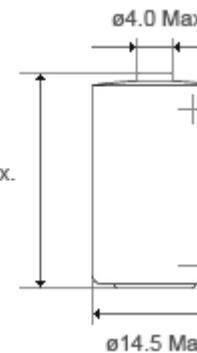

Dimensions in mm




Available Terminal Type

STD, T1, T2, T3, T3/R, T3EU, T3EU/R, AX, Wire, Connector, Case1, Case2


Storage Condition

Please store batteries at clean, cool (not over +30°C), dried (less than 30% RH) and ventilated condition


Discharge Characteristics at +20°C

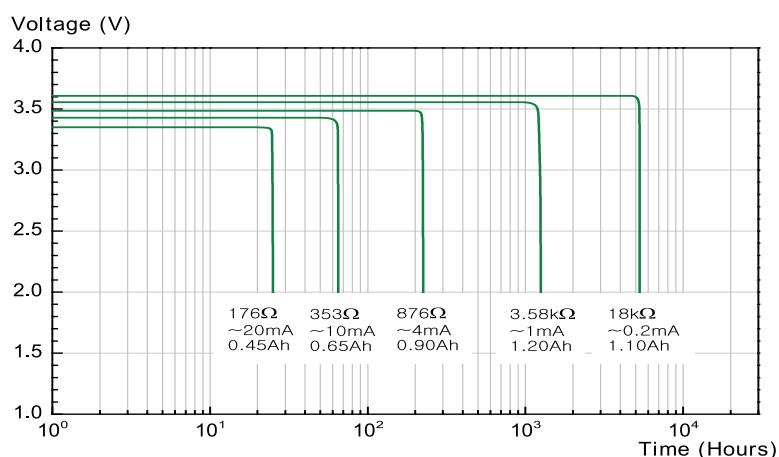

Capacity versus Current

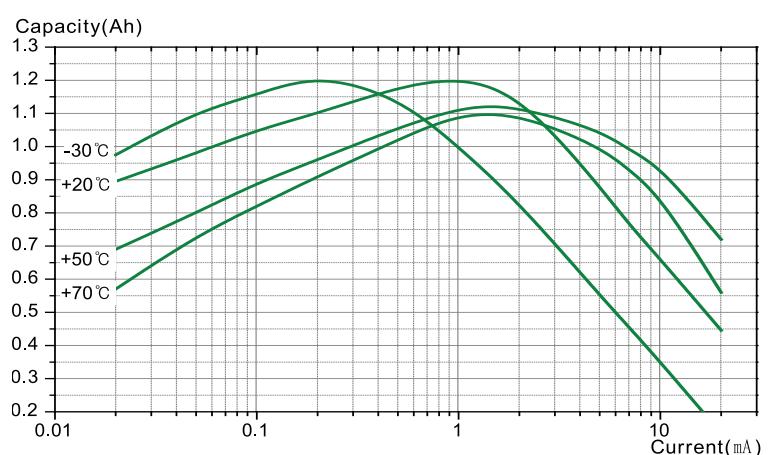

Operating Voltage

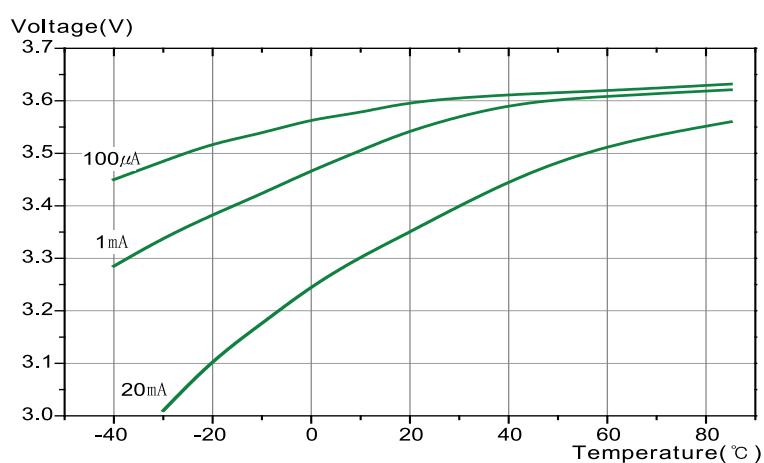

Voltage Recovery after Long Storage

